

Components for BZC8050 Control Stations

BB8050 Series Explosion-proof Ammeters/Voltmeters


- ◆ Explosion protection to
 - GENELEC
 - IEC
 - NEC
- ◆ Can be used in
 - Zone 1 and Zone 2
 - Zone 21 and Zone 22
 - Class I, Zone 1 and Zone 2
 - Class I, Division 2, Groups A, B, C, D
- ◆ Fast comparison of measured with set values
- ◆ Versions available
 - Ammeter (type 72)
 - Voltmeter (type 72)




■ Catalogue number logic

BB8050(B for short)

B - A (□/□)

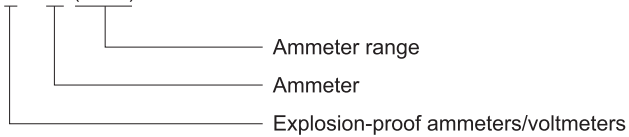

B - V (□)

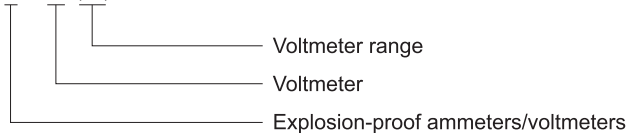


Zones 1&2; 21&22


Components for BZC8050 Control Stations

BB8050 Series Explosion-proof Ammeters/Voltmeters

Selection table

Version	Description	Overload scale	Measuring range	Ordering code	Weight (kg)
Ammeter BB8050-A(□/□) 	Direct measuring	2 times	0~20/40 mA	40121	0.20
			4~20/40 mA	40122	
	Direct measuring	2 times	0~1 A	40123	
			0~5 A	40124	
	For CT (current transformer)	2 times or 6 times	sek. 1 A	40125	
			sek. 5 A	40126	

Selection table

Version	Description	Measuring range	Ordering code	Weight (kg)
Voltmeter BB8050-V(□) 	Direct measuring	0~10 V	40127	0.20
		0~25 V	40128	
		0~40 V	40129	
		0~60 V	40130	
		0~100 V	40131	
		0~150 V	40132	
		0~250 V	40133	
		0~300 V	40134	
		0~450 V	40135	
		0~500 V	40136	
		0~600 V	40137	
	For PT (potential transformer)	sek. 100 V	40138	
		sek. 110 V	40139	
		sek. 120 V	40140	

Components for BZC8050 Control Stations

BB8050 Series Explosion-proof Ammeters/Voltmeters

Technical data

Explosion-proof ammeters/voltmeters BB8050

	Ammeter	Voltmeter
Explosion protection	⊕ II 2 G Ex e IIC Gb	⊕ II 2 G Ex e IIC Gb
Certificates	DNV 11 ATEX 92527U; IECEx CQM 11.0031U	DNV 11 ATEX 92527U; IECEx CQM 11.0031U
Conformity to standards	EN 60079-0, EN 60079-7 IEC 60079-0, IEC 60079-7	EN 60079-0, EN 60079-7 IEC 60079-0, IEC 60079-7
Enclosure material	Flame retardant plastic	Flame retardant plastic
Insulation voltage	690V AC	690V AC
Frequency	50/60Hz DC available	50/60Hz DC available
Working mode	Electromagnetic type (moving iron)	Electromagnetic type (moving iron)
Accuracy	Class 1.5	Class 1.5
Overload times	5 times 2 or 6 times on request.	
Ambient temperature	-20°C ~ +80°C	-20°C ~ +80°C
Cable connection	2.5mm ²	2.5mm ²
Size	72x72mm	72x72mm

Dimension drawings (all dimensions in mm) - subject to alteration

